



HeartWood Refresher is a product designed for periodic maintenance of varnished parquet and wooden flooring. The product will freshen up aged and matt varnish, will protect the varnish and provide a glossy and wear resistant finish.

Sealed Floors – HeartWood Refresher

Application:

The floor must be free from polish, wax and other contamination prior to treatment. Apply a thin coat of HeartWood Refresher using a clean, soft and lint-free cloth or sponge. HeartWood Refresher must not be thinned with water. Let the floor dry for 30 minutes before replacing furniture and carpets. The use of felt cushions on furniture is recommended to avoid unnecessary wear.

Maintenance:

Flooring treated with HeartWood Refresher should be kept clean by vacuum cleaning, dry mopping or mopping with a mop or cloth, well wrung in lukewarm water. HeartWood Cleaner or other neutral detergent may be added to the water used for cleaning. Note that alkaline detergents may remove the HeartWood Refresher.

In domestic use, re-apply HeartWood Refresher once or twice a year depending on wear. Re-apply as required on flooring with higher wear. HeartWood Refresher is also well suited to spot maintenance.

Note:

Unlike flooring treated with other polishes and waxes, flooring treated with HeartWood Refresher can be re-varnished. Clean the floor with HeartWood Cleaner, rub down lightly with grade 120 – 150 sanding paper, remove sanding dust apply new HeartWood Varnish.

MAINTENANCE

Sealed floors





Sealed Floors – HeartWood Cleaner

Product description:

HeartWood Cleaner is a cleaning agent developed for use on parquet, wood and other lacquered surfaces.

Application:

Wood and other lacquered flooring can be affected by water, so a well-wrung cloth/mop is recommended when cleaning. Measure: Normal daily cleaning: 25ml to 5 litres water. Badly marked floor: 50ml to 5 litres water.

Technical Specifications:

pH Values: Concentrated, approx. 10 working solution in water (0,5%), approx. 8. Content: Anionic and non-ionic tensides, chelating agents (complex builders), and glycoethers. Shelf life – At least 2 years from date of production, in original unopened container.

HeartWood Parkett Cleaner is a neutral detergent, pH approx. 8, designed specifically for use on sealed wooden floors and melamine laminate floors.

MAINTENANCE
Sealed floors





Oiled Floors – HeartWood Floor Soap

Range of Use:

HeartWood Floor Soap is used to clean oil treated parquet and wood floors, plus other oiled woodwork.

Cleaning:

For daily cleaning of oil treated floors, a dry cleaning method is recommended using a dry mop or vacuum cleaner. If it should be necessary to wash the floor, add max. 1 capful of HeartWood Floor Soap per litre water, for cleaning factory finished ready oiled parquet (UV oil). Use a well wrung cloth to avoid water spillage on the floor.

HeartWood Floor Soap is suitable for cleaning/maintenance of all other types of oiled – caustic treated or soap scrubbed floors, using a concentration of 1 litre of soap to 10-20 litres of warm water.


Technical Specifications:

Storage temperature must be in excess of 50°C. Shelf-life is approx. 5 years in unopened packaging. pH. value 9-10.

HeartWood Floor Soap is made of light, pure vegetable oils and natural waxes. The soap is effective for cleaning oiled floors. It is also available in WHITE, with added white pigments which are suitable for white oiled floors. HeartWood Floor Soap is a pure and environmentally correct product and does not contain solvents.

MAINTENANCE
Oiled floors



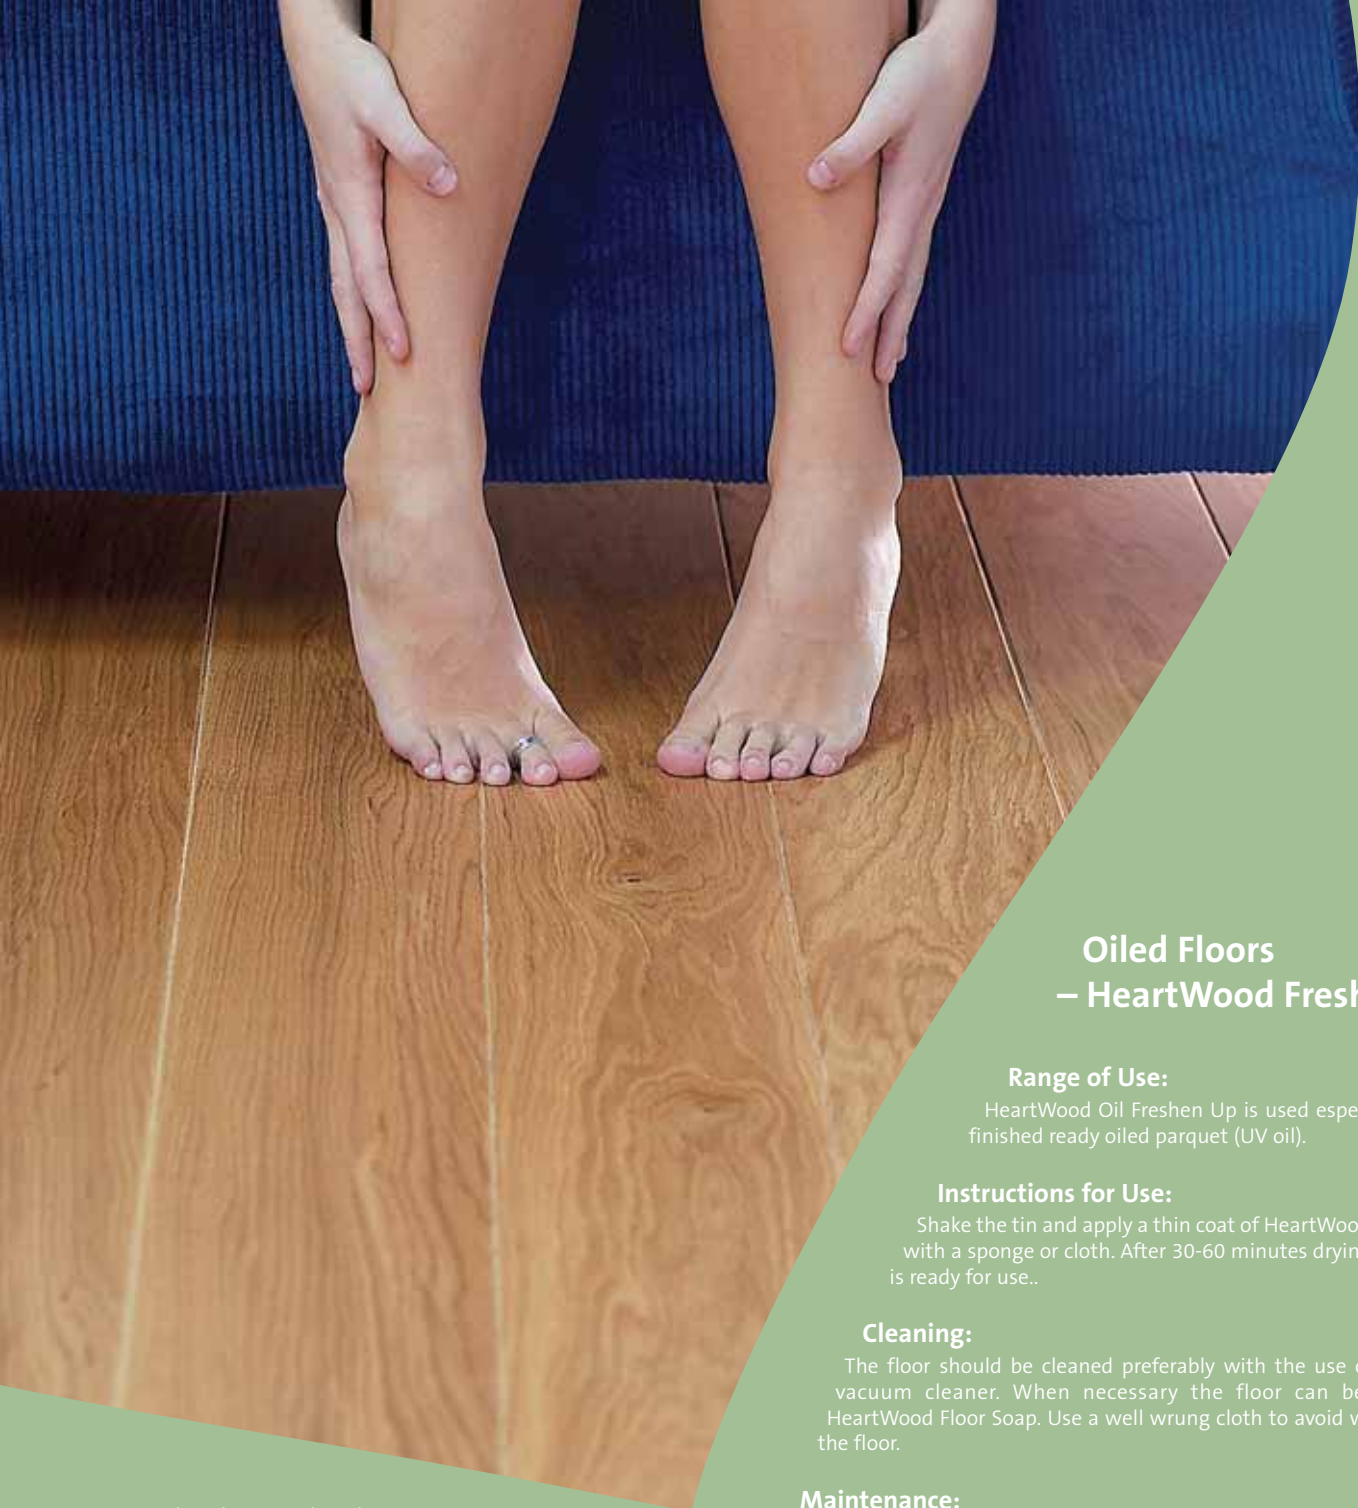

Oiled Floors – HeartWood Freshen Up

Range of Use:

HeartWood Oil Freshen Up is used especially for factory finished ready oiled parquet (UV oil).

Instructions for Use:

Shake the tin and apply a thin coat of HeartWood Oil Freshen Up with a sponge or cloth. After 30-60 minutes drying time the floor is ready for use..

Cleaning:

The floor should be cleaned preferably with the use of a dry mop or vacuum cleaner. When necessary the floor can be washed with HeartWood Floor Soap. Use a well wrung cloth to avoid water spillage on the floor.

Maintenance:

A refresher coat can be applied when required, depending on wear and tear. It is difficult to state how often the floor should be treated, but the rule of thumb is one coat annually in private homes. Areas of public use should be maintained 3-5 times annually, according to need.

Technical Specifications:

Use approx. 1 litre/100m². Shake before use. Storage temperature must be in excess of 50°C. Shelf-life is approx. 5 years in unopened packaging. pH. value 8-9.

Contents: Acrylic wax, bee and palm wax, emulsifier and water. WHITE: Acrylic wax, bee and palm wax, titanium dioxide, emulsifier and water.

HeartWood Freshen Up is based on acrylic wax together with natural bee and palm wax. The product does not contain solvents and is also available in WHITE (white pigments), suitable for white oiled floors.

HeartWood Oil Freshen Up gives excellent protection against dirt and moisture.

MAINTENANCE
Oiled floors

